Via monte Nero, 40/B – 21049 TRADATE (VA) ITALY
Phone: +39 (0)331841070 Fax:+39 (0)331841950 - e-mail:datexel@datexel.it - www.datexel.it

UNI EN ISO 9001:2008

Remote I/O module 8 input channels ± 20mA on RS-485 network

DAT 3017-I



FEATURES

- **Field-Bus remote data acquisition**
- **Modbus Slave device on RS-485**
- **Modbus RTU/ Modbus ASCII protocol**
- **8 channels input up to ± 20 mA**
- **Watch-Dog Alarm**
- **Remotely Configurable**
- **2000 Vac 3-ways Galvanic Isolation**
- **High Accuracy**
- **UL / CE mark**
- **DIN rail mounting in compliance with EN-50022**

GENERAL DESCRIPTION

The device DAT 3017-I is able to acquire up to 8 analogue input signals. The data are transmitted with MODBUS RTU/MODBUS ASCII protocol on the RS-485 network (RS-232 interface is available).
It is possible to connect on input current signals up to ± 20 mA.
The device guarantees high accuracy and stable measure versus time and temperature.
To ensure the plant safety, two Watch-Dog timer alarms are provided.
The isolation between the parts of circuit removes eventual ground-loop effects, allowing the use of the device even in the heavy environmental conditions.
The DAT 3017-I is in compliance with the Directive UL 61010-1 for US market and with the Directive CSA C22.2 No 61010-1 for the Canadian market.
The device is housed in a rough self-extinguishing plastic container which, thanks to its thin profile of 17.5mm only, allows a high density mounting on EN-50022 standard DIN rail.

COMMUNICATION PROTOCOLS

The DAT 3017-I is designed to work with the MODBUS RTU/MODBUS ASCII protocol: standard protocol in field-bus; allows to directly interface DAT3000 series devices to the larger part of PLCs and SCADA applications available on the market.
For the protocol instructions, refer to the User Guide of the device.

USER INSTRUCTIONS

Before to install the device, please read the “Installation Instruction” section.
If the module configuration is unknown, with device powered off, connect the INIT terminal to the GND terminal (ground), at the next power on the device will be auto-configured in the default settings (refer to the User Guide of the device).
Connect power supply, serial bus and analogue inputs as shown in the “Wiring” section.
The “PWR” LED state depends on the working condition of the device: see the "Light Signalling" section to verify the device working state.
To perform configuration and calibration operations, read the instructions in the User Guide of the device.
To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)

INPUT

Input type	Min	Max
Current 20 mA	-20 mA	+20mA

(1) Referred to input Span (difference between max. and min. values)

Input Accuracy (1)	
Current	± 20 uA
Linearity (1)	
Current	± 0.1 % f.s.
Input Impedance	
Current	<= 22 Ω
Thermal drift (1)	
Full scale	± 0.005 % / °C
Sample time	0.5 ÷ 1 sec.
Data Transmission	
Baud Rate	38.4 Kbps
Max. distance	1.2 Km – 4000 ft

POWER SUPPLY	
Power supply voltage	10 .. 30 Vdc
Reverse polarity protection	60 Vdc max
Current consumption	30 mA max.

ISOLATION	
Input – RS485	2000 Vac 50 Hz, 1 min.
Supply – Input	2000 Vac 50 Hz, 1 min.
Supply – RS485	2000 Vac 50 Hz, 1 min.

ENVIRONMENTAL CONDITIONS	
Operative Temperature	-10°C .. +60°C
UL Operative Temperature	-10°C .. +40°C
Storage Temperature	-40°C.. +85°C
Humidity (not condensed)	0 .. 90 %
Maximum Altitude	2000 m
Installation	Indoor
Category of installation	II
Pollution Degree	2

MECHANICAL SPECIFICATIONS	
Material	Self-extinguish plastic
IP Code	IP20
Wiring	wires with diameter 0.8÷2.1 mm^2 /AWG 14-18
Tightening Torque	0.5 N m
Mounting	in compliance with DIN rail standard EN-50022
Weight	about 150 g.

CERTIFICATIONS	
EMC (for industrial environments)	
Immunity	EN 61000-6-2
Emission	EN 61000-6-4
UL	
US Standard	UL 61010-1
Canadian Standard	CSA C22.2 No 61010-1
CCN	NRAQ/NRAQ7
Typology	Open Type device
Classification	Industrial Control Equipment
File Number	E352854

INSTALLATION INSTRUCTIONS

The DAT 3017-I is suitable for fitting to DIN rails in the vertical position.
For optimum operation and long life follow these instructions:

When the devices are installed side by side it may be necessary to separate them by at least 5 mm in the following case:
- If panel temperature exceeds 45°C and at least one of the overload conditions exist.

Make sure that sufficient air flow is provided for the device avoiding to place racewais or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel.
Install the device in a place without vibrations.

Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters etc...) and to use shielded cable for connecting signals.

CABLING

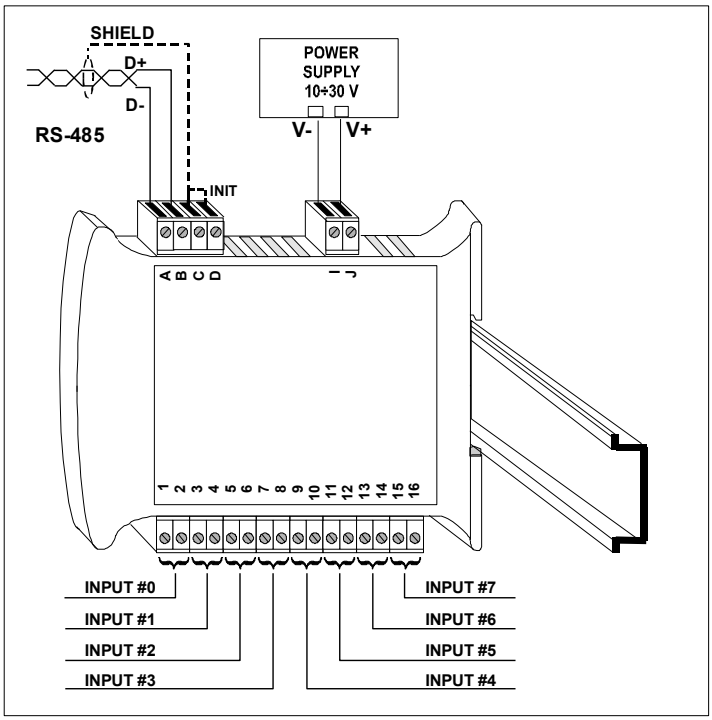

WIRING

ANALOG INPUTS

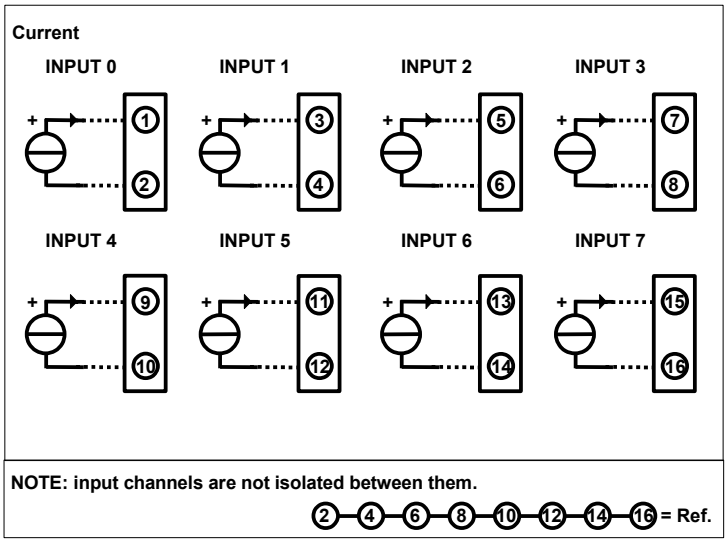

RS-485 NETWORK

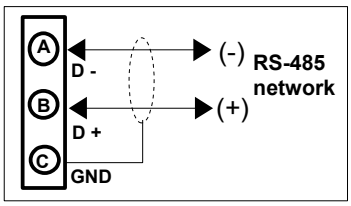

RS-232 NETWORK

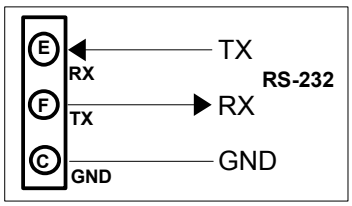

POWER SUPPLY (*)

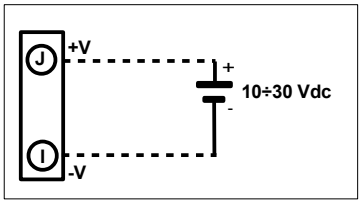

INIT



(*) Note: for UL installation the device must be powered using a power supply unit classified NEC class 2 or SELV

LIGHT SIGNALLING

LED	COLOUR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered / Wrong RS-485 cabling.
		FAST BLINK	Communication in progress (blink frequency depends to baud-rate)
		1 second BLINK	Watch-Dog Alarm condition

ISOLATION STRUCTURE

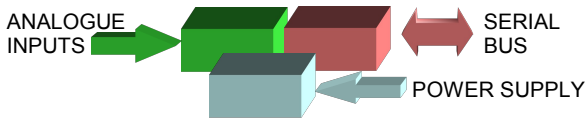

MECHANICAL DIMENSIONS (mm)

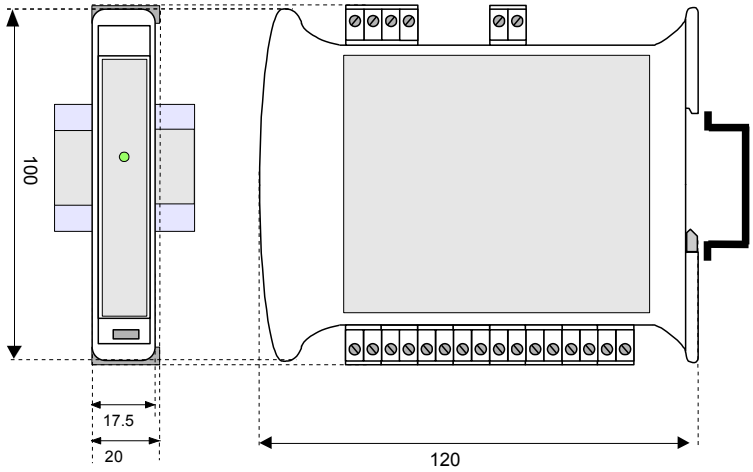

HOW TO ORDER
In the order phase, it is mandatory to specify the interface type (RS485 or RS232) .

ORDER CODE:

DAT 3017-I / 485

Interface type
485 : RS-485
232 : RS-232

= Requested
= Optional